



Anvendelsesmuligheder T-støttemure (agrarisk)

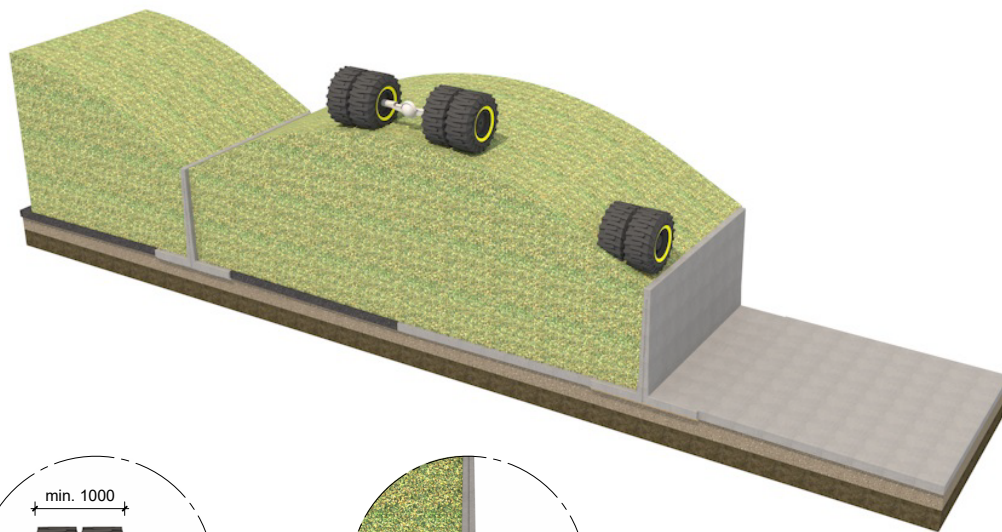

Fritstående tilføjelse

Akseltryk	Model	Asfalteret
10T	TW400	140mm mod basen
15T	TWA200_15T	140mm mod basen
	TWA250_15T	140mm mod basen
	TWA300_15T	140mm mod basen
	TWA350_15T	140mm mod basen
20T	TWA150	140mm mod basen
	TWA175	140mm mod basen
	TWA200	140mm mod basen
	TWA250	140mm mod basen
	TWA300	140mm mod basen
	TWA400	140mm mod basen

Forskellige anvendelser/belastninger oplyses på forespørgsel

<p>Max. 28°</p>	<p>Max. silage height panel height + 0.5m</p>	<p>Dry matter content</p> <p>min. 33%</p> <p>min. 25%</p>	<p>Store silage at max. 800kg per m³</p> <p>D: Füllgutklassen 1 u. 2a nach DIN 11622-2</p>	<p>This silage clamp complies with:</p> <ul style="list-style-type: none"> BS 5502-22 Agricultural building and structures BRL 2812 Agricultural concrete products BS EN 13369 Precast concrete products
------------------------	---------------------------------------------------	-------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

De viste applikationer er baseret på den hollandske standard og kan variere fra land til land. Det kan potentielt påvirke din ønskede løsning.